


Oil-only absorbent pillow

100% meltblown polypropylene fill · spunbond sleeve · manufactured in Ukraine

ARTICLES
SL-P-250-200-210
SL-P-500-400-310

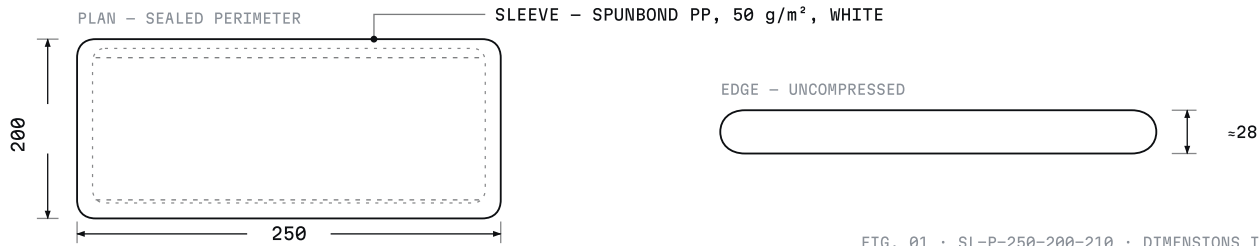

1 – DESCRIPTION

A hydrophobic sorbent pillow for drip collection under plant, for sumps and bunds, and for recovering standing oil where a boom cannot reach. 100% meltblown fill, higher capacity per gram than our socks because it is not held under tension in a sleeve.

2 – RANGE AND CONSTRUCTION

ARTICLE	SIZE, MM	FILL	PIECE
SL-P-250-200-210	250 × 200	210 g	215 g
SL-P-500-400-310	500 × 400	310 g	330 g

Piece mass nominal, including sleeve **<confirm>**. Fill tolerance ± 10 g.

Sleeve	Spunbond polypropylene, 50 g/m ² , white
Fill	100% meltblown polypropylene
Perimeter	Sealed. No adhesive, no metal.
Colour	White — oil-selective

3 – PACKING AND LOGISTICS

Bale	20 pieces, polyethylene
Bale mass / dimensions	4.3 kg (250 × 200) · 6.6 kg (500 × 400) · <mm>
Pallet	1200 × 800 mm <confirm pcs / kg / m³>
Storage	Dry, indoors, −20 °C to +50 °C. No expiry sealed.
Origin	Ukraine. EUR.1 certificate with each consignment.
Customs classification	<confirm by BTI ruling>

4 – ABSORBENCY

DIESEL, DRAINED	250 × 200	500 × 400
Capacity, typical	12.3 g/g	10.6 g/g
Capacity, typical	14.6 L/kg	12.6 L/kg
Capacity, minimum	11.0 g/g	9.5 g/g
Volume per piece, typical	3.08 L	3.91 L
Volume per bale of 20	62 L	78 L
Water pick-up	None measurable — floats	
Diesel at 0.84 kg/L, ambient 20 °C. Full record in TR-01.		

5 – TEST BASIS

In-house gravimetric method following the principles of ASTM F726: **15 min fully immersed, 2 min free drain, reweigh.** Not a test to a published standard — ASTM F726 measures recovery from a water surface, and the withdrawn BS 7959-1 used a 30-second drain. Tested at our own mill. Full record in TR-01.

6 – SUITABILITY AND LIMITATIONS

- 01 **For** mineral and synthetic oils, diesel, lubricants, hydraulic and cutting fluids, and non-aggressive hydrocarbons.
- 02 **Not for** acids, alkalis, oxidising agents, solvents or water-based liquids. Verify compatibility before use.
- 03 **Not antistatic.** Not for aviation fuel service.
- 04 Used sorbent takes on the hazard properties of the absorbed liquid — see SD-01.

White denotes an oil-selective sorbent — the convention formerly specified in **BS 7959-3**, withdrawn by BSI on 5 March 2024 without replacement. We follow the convention; we do not claim conformity to a withdrawn standard.

ISSUED BY

Secure Trading Solution Ltd, trading as Sorbloft

Registered in England and Wales, company number

<no.>

· VAT

<GB no.>

<registered address>

sales@sorbloft.com ·

<telephone>

· sorbloft.com

The figures in this data sheet are typical values obtained from our own measurements on production material and are given in good faith. They are not a specification and do not constitute a warranty. Suitability for any particular application is the responsibility of the user, who should verify compatibility and performance under actual conditions of use before adoption.

APPROVED BY **<NAME, POSITION>**